





INSTALLATION EXAMPLE

COM XRT 2.0

COM XRT 1200 2.0

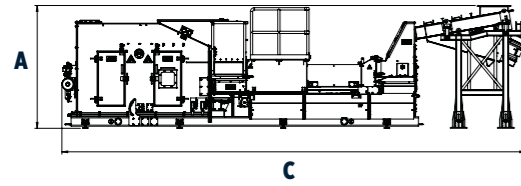

COM XRT 2400 2.0

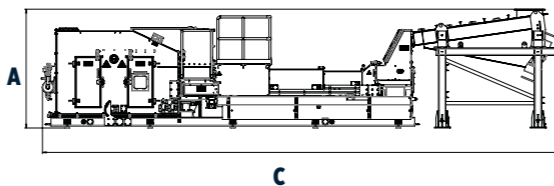

COM XRT 1200 2.0	
A	2600 mm
B	2400 mm
C	9850 mm

COM XRT 2400 2.0	
A	2900 mm
B	3650 mm
C	11900 mm

PRODUCT SPECIFICATIONS

	COM XRT 1200 2.0	COM XRT 2400 2.0
Size Range	10 - 125 mm	10 - 125 mm
Feed Rate	up to 250 t/h	up to 500 t/h
Size Ratio	1:3	1:3
Operational width	1,200	2,400
Sensors	X-ray sensor, High Resolution (HR) or High Sensitivity (HS)	X-ray sensor, High Resolution (HR) or High Sensitivity (HS)
Number of Ejectors	192 / 152	384 / 300
Nozzle Pitch	6,25 mm / 8 mm	6,25 mm / 8 mm
Electric Power	3 phase, approx. 18 kVA	3 phase, approx. 22 kVA
Weight (Sorter)	13600 kg	21400 kg
Weight (Feeder)	1750 kg	3700 kg

The capacity, performance and dimension data are indicative and may change without prior notice. Exact numbers on request.

PRODUCT RANGE

PRO SERIES (Chute based)

Size range from 2 mm to 250 mm is covered by three models which can be equipped with COLOR, Near-Infrared (NIR), LASER and Electromagnetic (EM) technology or a combination thereof.

COM SERIES (Belt based)

High capacity sorting on a belt feeding system is key for this product series. Different models and widths are available which can be equipped with X-Ray Transmission (XRT), Electromagnetic (EM), COLOR and/or Near-Infrared (NIR) technology.

APPLICATIONS

XRT

Diamonds // Industrial Minerals, e.g. Phosphate, Limestone // Base metals, e.g. Tungsten, Tin, Lead, Zinc // Precious metals, e.g. Gold // Ferrous metals, e.g. Iron Ore

COLOR

Industrial Minerals, e.g. Magnesite, Calcite, Talc, Quartz, Feldspar, Burnt lime

LASER

Industrial Minerals, e.g. Quartz, Fluorspar, Spodumene, Rock salt // Precious metals, e.g. Gold

NIR

Industrial Minerals, e.g. Talc, Borate, Calcite, Lithium // Kimberlite

EM

Slag, e.g. Stainless steel, Base metal, Ferro silica, Ferro chrome, Silica // Massive nickel sulphides // Manganese

COM XRT 2.0



WWW.TOMRA.COM/MINING

Europe/Russia/China

TOMRA Sorting GmbH*
Feldstrasse 128
22880 Wedel/Hamburg
Germany
Phone: +49 4103 1888 0
Fax: +49 4103 1888 188
mining-sorting@tomra.com

Australasia

TOMRA Sorting Pty Ltd
Unit 1, 20 Anella Avenue
Castle Hill NSW 2154
Australia
Phone: +61 2 8624 0100
Fax: +61 2 8624 0101
mining-sorting@tomra.com

Southern Africa

TOMRA Sorting (Pty) Ltd
37 Angus Crescent
Longmeadow Business Estate
Edenvale 1609
South Africa
Phone: +27 11 010 0300
Fax: +27 86 602 4646
mining-sorting@tomra.com

North America

TOMRA Sorting, Inc.
1536 Cole Blvd, Suite 225
Golden, Colorado 80401
USA
Phone: +1 720 870 2240
Fax: +1 720 870 2241
mining-sorting@tomra.com

South America

TOMRA Brasil Soluções em
Segregação LTA
Rua Fernandes Moreira,
883-Chácara Santo Antonio
04716-002 São Paulo
Brazil
Phone: +55 11 3294 3400
mining-sorting@tomra.com



We print on 100% recycled paper to reduce our carbon footprint. You can reduce yours by using our sensor-based sorting equipment.



ISO 9001 certified

2021/01_GB

SENSOR-BASED ORE SORTING SINCE 1993

COM XRT 2.0


The COM (common belt) series sorting equipment covers the range of applications which require a belt feeding system. The belt principle allows the presentation of a less uniform feed. The particles can stabilize on the belt before they are scanned by the sensor(s). Two sensor technologies are available, XRT and EM.

TECHNOLOGY XRT

X-ray transmission technology enables materials to be recognized and separated based on their specific atomic density. It is based on a planar projection of X-ray attenuation of single particles in a stream. This technology makes it possible to obtain a high separation performance in sorting materials irrespective of size, moisture, dust or dirt on a surface.

TECHNOLOGY EM

The optional EM sensor allows the discrimination of particles by permeability and conductivity properties. The highly sophisticated SUPPIX[®] image processing technology enhances the resolution of the digitalized sensor signals. Thus it is possible to identify the finest conductive particles with great precision and subsequently separate them with a high degree of efficiency.

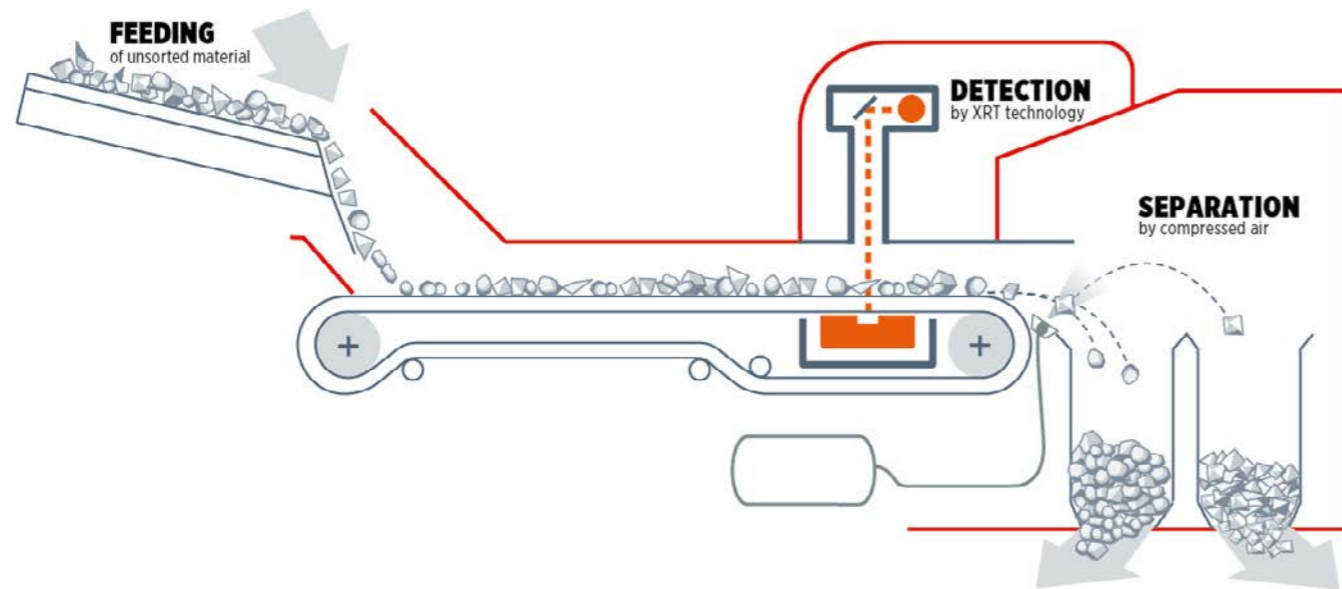

STANDARD APPLICATIONS

DIAMONDS (KIMBERLITE, ALLUVIAL)

Primary Diamond Concentration // XRT

INDUSTRIAL MINERALS (E.G. PHOSPHATE, LIMESTONE, MAGNESITE, LITHIUM)

Waste rock reduction // Transport, wear and process cost savings // XRT

FERROUS METALS (E.G. CHROMITE, IRON ORE)


Lump ore production // Pre-concentration // Transport and process cost savings // XRT

BASE METALS (E.G. TUNGSTEN, TIN, LEAD, ZINC, COPPER)

Pre-concentration // Increase productivity // Reduced cash costs // Marginal resources turned into reserves // XRT // EM

PRECIOUS METALS (E.G. GOLD)

Pre-concentration // Increase productivity // Reduced cash costs // Marginal resources turned into reserves // XRT // EM

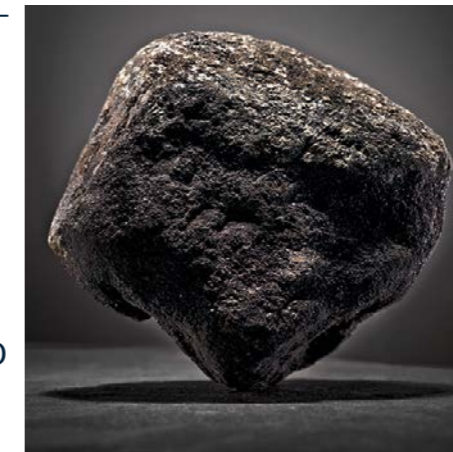

TOMRA Sorting Solutions offers a variety of configurations for different tasks and conditions. You are welcome to check your individual material in one of our test centers. E-mail: mining-sorting@tomra.com

BENEFITS

