


ORWAK 5070-COMBI

Orwak 5070-Combi is a baler and an in-bin-compactor in the same machine. It is a flexible all-round-solution that takes care of both the bagged mixed waste and your recyclable packaging material.

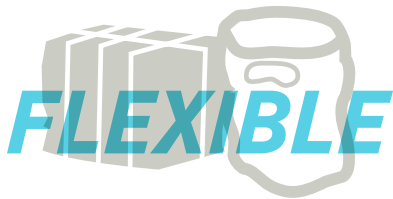

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time devoted to your core activities.

VOLUME REDUCTION

More compaction = less waste volume to transport for recycling or disposal. Fewer transports required results in lower transportation costs and reduced CO₂ emissions.


BETTER HYGIENE

Hygienic handling of waste in bags using a piece of equipment that is easy to clean, contributes to better hygiene.



ORWAK 5070-COMBI

All-Round-Solution

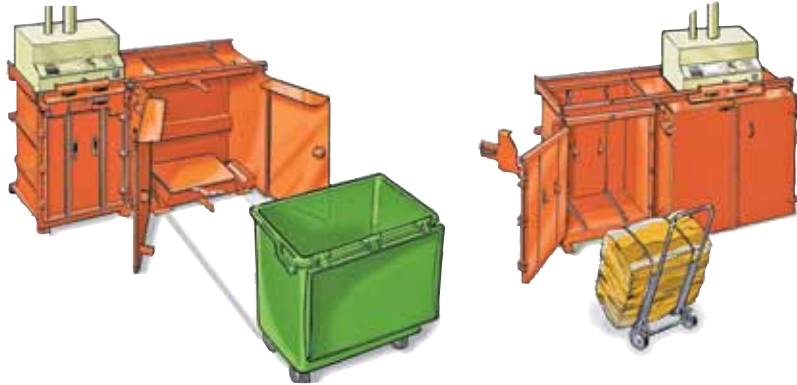

ORWAK 5070-COMBI IS OPTIMIZED FOR:

PAPER

- + Cardboard
- + Shredded
- + Paper sacks

PLASTIC FOIL

- + Shrink film
- + Plastic bags

OTHER METALS

- + Steel straps

OTHER PLASTICS

- + Plastic straps

SEMI-DRY WASTE

- + Bagged general waste

EXTENDABLE SYSTEM

Orwak 5070-Combi is an extendable system with an easily manoeuvred press head that serves several chambers.

DUAL-FUNCTION UNIT

When you go for Orwak 5070-Combi, you get a baler for recyclables and an in-bin-compactor in the same machine!

VERSATILE

It takes care of both dry and semi-wet waste as well as baling cardboard boxes, paper and plastics.

DESIGNED FOR STANDARD BINS

It is suitable for most standard wheeled bins of 660 litres.

USER-FRIENDLY

The top-loading multi-chamber unit is simple to operate convenient to feed with new material.

BALE TROLLEY INCLUDED


Orwak 5070-Combi is always delivered with a bale trolley for easy baling and internal transportation of the the bale.

DIMENSIONS AND SPECIFICATIONS

Dimensions				
A	B	C/C*	D	E
660L/400L	660L/400L	660L/400L	660L/400L	660L/400L
2265/2315 mm	2550/1960 mm	920/808 mm 1011/899 mm*	2675/1733 mm	1325/1333 mm

*Including strap holders

WEIGHT (MACHINE) TOTAL:	803/6181	KG
BALING CHAMBER:	196/1961	KG
BIN CHAMBER:	450/2651	KG
PRESS UNIT:	157/1571	KG

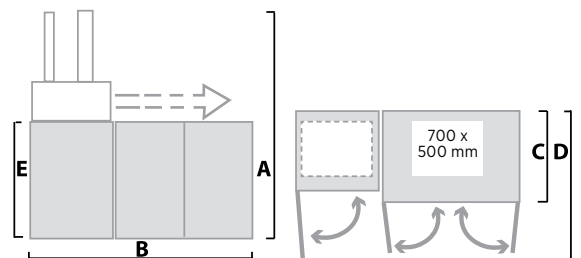

Technical specifications

LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 700 mm Height: 500 mm	36 secs	3 ton, 30 kN	Width: 700 mm Depth: 500 mm Height: 700 mm	Cardboard: Up to 50 kg Plastic: Up to 80 kg	< 70 db (A)	IP 55	Single phase 230 V, 50 Hz, 10 A

All dimensions and data are for one baling chamber and one bin chamber. For other combinations contact us.



TOMRA Compaction AB

Box 58, SE-576 22 Sävsjö, Sweden

Tel: +46 382-157 00

Fax: +46 382-106 07

E-mail: info.compaction@tomra.com

www.tomracompaction.com

We reserve the right to make changes to specifications without prior notice.
Bale/bag/bin weights are dependent upon material type.